

BLAZE TUNNEL



Specifications

Input Voltage	230V AC 50 Hz
Operating Temperature	-20 °C to 50 °C
Ingress Protection	IP 65
Colour Temperature	3000 K/4000 K /6000 K
Colour Rendering Index	> 70
Lifespan	Typically 35, 000 Hours
Power Factor	> 0.9
Safety Standard	EN 60598
EMC / EMI Standard	EN 61547/EN 55015
Harmonics	EN 61000-3-2 and 61000 - 3- 3

Product Description

Beautifully designed aluminium die cast housing with tempered glass and good light distribution makes Blaze Tunnel suitable for use in Tunnels, Gas stations, Petrol Pumps.

Other Features


Dimmable (Optional)

Product Code	Input Power	Lumen Output	Replacement of	Size (L x B x H)
XT 01 13	70W	5900	150 W HPSV	314 x 215 x 108

Mechanical


Housing	Powder Coated Die Cast Aluminium
Optics	Glass
Installation	Surface / Pole

Dimension Drawing

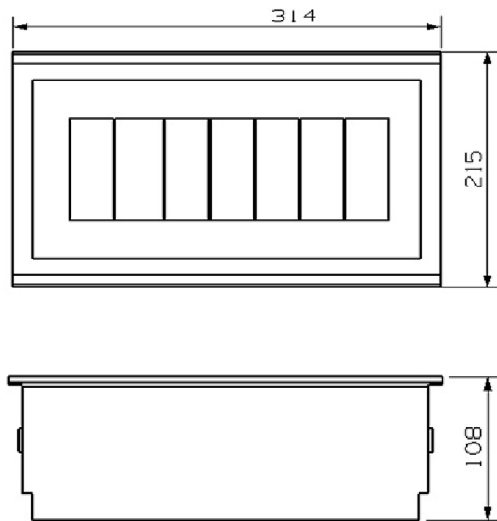

All dimensions in mm

Polar Candela Distribution

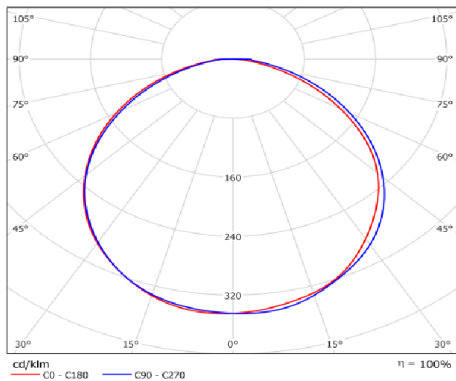

Application Area

Tunnels, Petrol Pumps, Flood Lights

