

# CORONA



## Specifications

<b>Input Voltage</b>	230V AC 50 Hz
<b>Operating Temperature</b>	-20 °C to 50 °C
<b>Ingress Protection</b>	IP 65
<b>Colour Temperature</b>	3000 K/4000 K /6000 K
<b>Colour Rendering Index</b>	> 70
<b>Lifespan</b>	Typically 50, 000 Hours
<b>Power Factor</b>	> 0.9
<b>Safety Standard</b>	EN 60598
<b>EMC / EMI Standard</b>	EN 61547/EN 55015
<b>Harmonics</b>	EN 61000-3-2 and 61000 - 3- 3

## Product Description

A cost-effective range of robust and energy efficient bulkhead luminaires suitable for interior or exterior applications. A great light for office lighting in corridors, toilets, kitchens, stairwells, balconies.

## Other Features


Dimmable (Optional)

Product Code	Input Power	Lumen Output	Replacement of	Size ( Ø x H)
IC 12 31	15 W	1300	2 x 13 W CFL	Ø 296 x 96
IC 12 32	15 W	700	2 x 13 W CFL	Ø 296 x 96
IC 12 11	20 W	1700	2 x 18 W CFL	Ø 296 x 96
IC 12 12	20 W	930	2 x 18 W CFL	Ø 296 x 96

## Mechanical


<b>Housing</b>	Polycarbonate
<b>Optics</b>	Diffuser ( Opal / Clear)
<b>Installation</b>	Surface

## Dimension Drawing

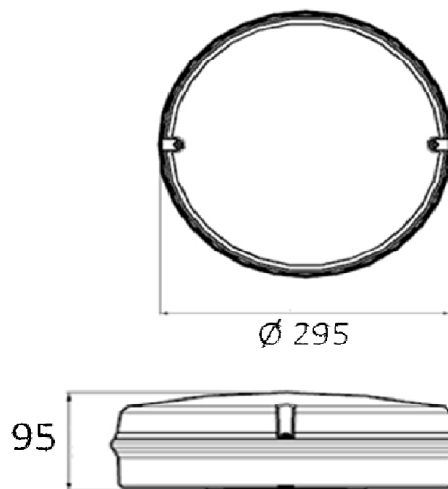

All dimensions in mm

## Polar Candela Distribution

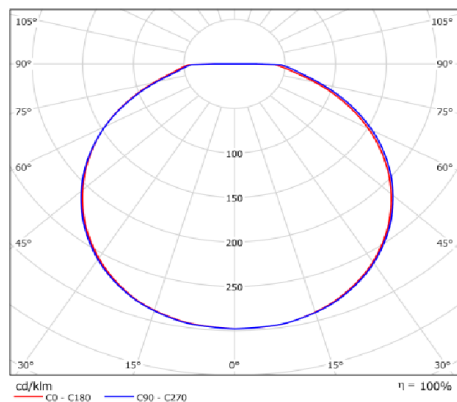

## Application Area

Offices, Banks, Hotels, Retail Outlets, Parking Area, Corridors, Entrance Halls, Staircases

